



- G1760HFC** Eye/Face Wash, Pedestal Mounted, Hand and Foot Control, Stainless Steel Bowl
- G1760P-HFC** Eye/Face Wash, Pedestal Mounted, Hand and Foot Control, Plastic Bowl

Application: Free standing, pedestal mounted eye/face wash with hand and foot control. Water flow is activated by either flag handle or foot treadle. Two large FS-Plus™ spray-type outlet heads deliver a flood of water for rinsing eyes and face.

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Valve is activated by flag handle or foot treadle. Unit remains in operation until handle is returned to closed position.

Bowl: 11-1/8" diameter stainless steel (G1760HFC) or 11-3/4" diameter orange ABS plastic (G1760P-HFC).

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers for high visibility and corrosion resistance.

Supply: 1/2" NPT female inlet.

Waste: 1-1/4" NPT female outlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Valve, bowl and spray head assembly is factory assembled and water tested prior to shipment.


Available Options

- BC** Stainless steel bowl cover (G1760HFC only). Cover protects unit against contaminants. Cover is automatically raised when unit is activated.
- HS** Auxiliary hand-held drench hose for rinsing eyes, face or body.
- G3600LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to “Tempering Valves” section for complete technical and product selection information.





- **G1760HFC** Eye/Face Wash, Pedestal Mounted, Hand and Foot Control, Stainless Steel Bowl
- **G1760P-HFC** Eye/Face Wash, Pedestal Mounted, Hand and Foot Control, Plastic Bowl

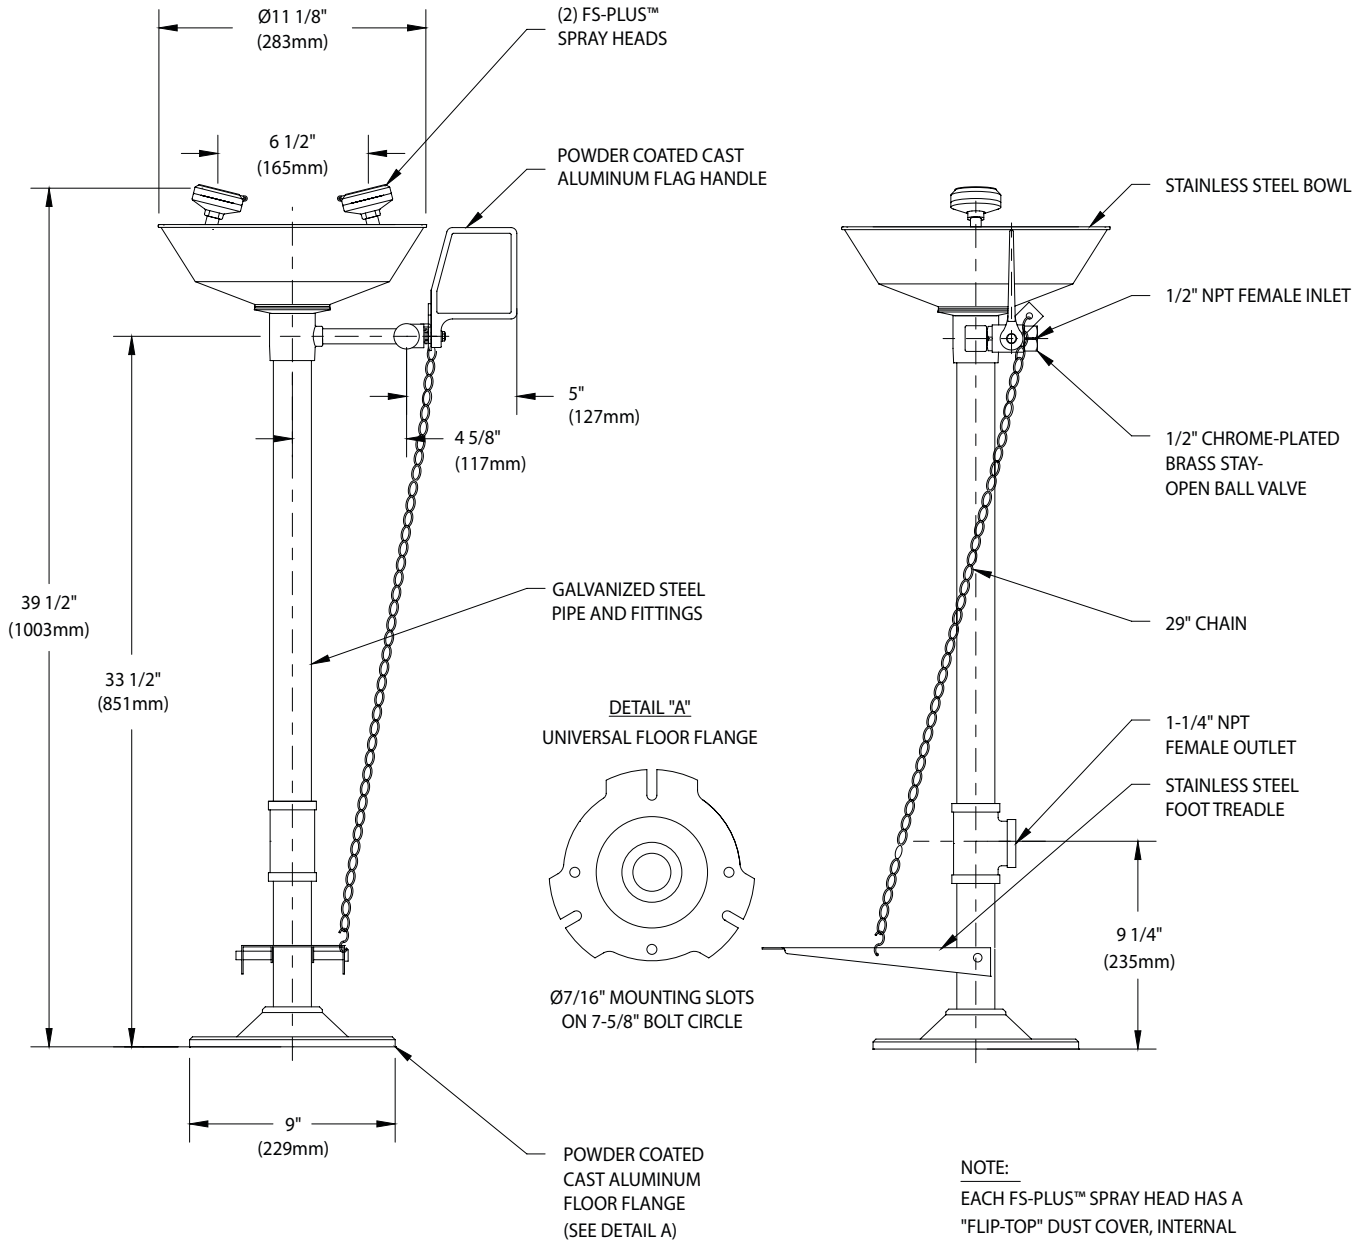

NOTE:
EACH FS-PLUS™ SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 081018

